




FCS2400 Fibre Channel to SCSI Bridge

A high performance, cost effective fibre to SCSI channel bridge

Product Features:

- 2 x 4Gb Fibre Channel Ports
- 4 x Ultra 160 SCSI Ports
- Up to 16,000 Initiators
- Non-Blocking Cache
- Low Power Design
- Separate Management Interface
- GUI Interface

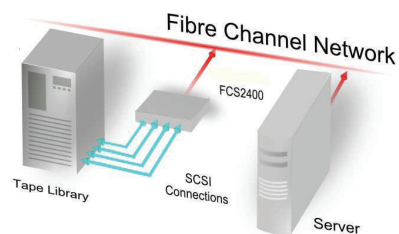

FCS2400

Fibre Channel to SCSI Bridge

The FCS2400 Fibre Channel to SCSI Bridge is a high performance protocol bridge for connecting SCSI enabled peripherals such as Disks, Tape Drives, Tape Libraries and Optical devices to Fibre Channel Networks

The FCS2400 is housed in an industry standard 1U 19" rack mount enclosure with integral power supplies and cooling. Connectivity to the Fibre Channel Network is via 2 auto-sensing 4Gb ports that can detect the network connection speed and to the SCSI peripheral devices via 4 Ultra 160 SCSI ports.

Managing and installing the FCS2400 could not be easier with its inbuilt intuitive GUI that is easy to use and provides the user with on screen help where necessary.

KEY ADVANTAGES:

Performance The FCS2400 has many unique features to maximise performance and ensure your data is transferred to the peripheral devices in the shortest possible time. With its unique non-blocking data cache module and patent applied modular technology, the FCS2400 provides industry leading performance.

Ease of Use With every increasing pressure on IT staff, there is less time to spend on learning and managing new products. Therefore, it is critical that new products are intuitive and easy to use. Avax works closely with its customers to ensure this is always the case

Return on Investment Maximising the return on any investment has always been critical. By using the FCS2400 to connect existing SCSI devices to the Fibre Channel Network not only maximises your investment but also adds a new level of functionality and flexibility,

Environmental The FCS2400 uses the latest power supply technologies with typical efficiencies of 95%, which minimise electrical power consumption and heat output.

AVAX INTERNATIONAL

PO Box 542

Hillsburgh, Ontario N0B 1Z0 Canada

Tel: (800) 443-4542 or (647) 367-1039

Fax: (647) 438-2242

www.avax.com



Specifications

Fibre Channel Ports		
Connection	2x 4Gb SFP NL_port, FL_port, F_port, N-port	
Speed	Auto-sensing 1/2/4Gb/s	
Maximum Block Size	1MB	
Standards	FC-AL FC-PLDA FC-TAPE FC-PH FC-FLA FCP-SCSI FC-FS	
SCSI LVD		
Connection	4 x Ultra160 68 Way VHDL	
Speed	Auto sensing N, F, W Ultra80 Ultra160	
Management Port		
Connection	10/100/1000Mb Ethernet RJ45	
Visual Indicators	Power, SCSI Activity, Fibre Channel Speed & Activity, Ethernet Link & Activity	
Physical		
Enclosure Form Factor	19 " 1U Rack Mount	
Dimensions	L 179 mm: W 437mm: H 44 mm	
Operational Temperature	0 to 40°C	
Non-Operational Temperature	-20° to 60°C	
Power Consumption	110-230Vac: 25-Watts approx	

Available from: