




SE1100 SCSI to iSCSI Bridge

A high performance, cost effective SCSI to iSCSI bridge

The SE1100 Bridge enables SCSI based Servers to connect to iSCSI enabled storage devices. Many legacy Servers installed and employed in day-to-day work are unable to support the iSCSI protocol due to either the cost of upgrade the server hardware and or the Operating System

This means that they cannot benefit from the many advantages that iSCSI brings—just the flexibility to increase the distance between the Server and the devices and the ability to share devices between Servers underline the usefulness of moving to iSCSI.

With the SE1100 it is now possible to connect these SCSI based servers to an iSCSI based network in a simple and cost effective way. By placing the SE1100 device between the SCSI interface and the iSCSI network legacy servers can enjoy the benefits of iSCSI without any changes to the hardware, operating system or applications

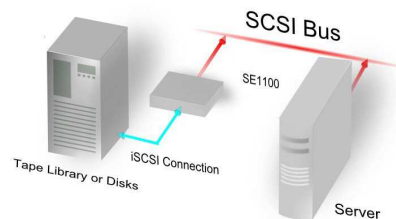


SE1100

Product Features:

- 1Gb Ethernet Port
- Ultra 160 SCSI Port
- Up to 256 Targets
- Non-Blocking Cache
- Low Power Design
- iSNS
- CHAP
- Jumbo Packet Support
- GUI Interface

Linking remote devices via a iSCSI

SCSI based storage devices can be situated remotely by combining the SE1100 with a ES1100 iSCSi to SCSI Bridge.

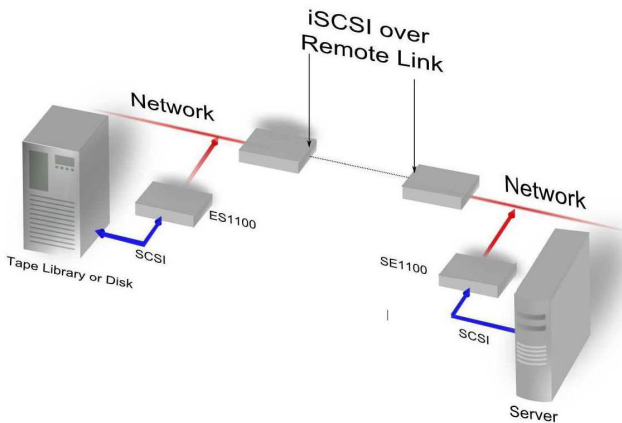

Specifications

Ethernet Ports		
Connection	1Gbe RJ45	
Speed	Auto-sensing 10/100/1000Mb/s	
Error Recovery	ERL0, ERL1, ERL2	
Maximum Packet Size	16Mb	
Maximum Targets	256	
Standards	IPv4, iSCSI, iSNS, CHAP,	
SCSI Ports		
Connectivity	1 Ultra160 68 Way VHDCI	
Speed	Auto sensing N, F, W Ultra80 Ultra160	
Management Port		
Connection	GUI via Ethernet port	
Visual Indicators		
LED indicators for:	Power, Network Activity Network Speed, Link Present,	
Physical		
Enclosure Form Factor	19 " 1U Rack Mount	
Dimensions	L 179 mm: W 437mm: H 44 mm	
Operational Temperature	0 to 40°C	
Non-Operational Temperature	-20° to 60°C	
Power Consumption	110-230Vac: 20-Watts approx	

AVAX INTERNATIONAL

PO Box 542
 Hillsburgh, Ontario N0B 1Z0 Canada
 Tel: (647) 367-1039 or (877) 401-1892
 Fax: (647) 438-2242
www.avax.com



Available from:

